CATEGORY

ELECTRICAL CONDUIT

AMMO ITEM #

LTM-UL

Company: _____

Job: _____ #Item: _____

Notes: _____

Flexible Liquid Tight Metallic Conduit
PVC JACKET - STEEL

UL LISTED

APPLICATION
- Liquid Tight Flexible Metal Conduit is applicable for the protection ofcircuit with 600 volts or lower in locations where UL certificate is required, including commercial buildings, industrial / power plant, shipyards, marine or boat, computer rooms and etc

STANDARD MATERIAL
- Hot Dipped Galvanized

FLEXIBILITY
- Medium

TEMPERATURE RANGE
- -10°C~+60°C Dry, 60° Wet, 60°C Oil

FIRE RETARDANT
- Self-extinguishing

IP RATING
- IP 40 IP 66

UV RESISTANCE
- Yes


JACKET COLOR
- Grey (Standard)

CERTIFICATE
- UL Listed

SUITABLE FOR USE IN HAZARDOUS (CLASSIFIED) LOCATIONS
- NEC Article 501.10 (B) (2) & 501.30 (B) Class II Div. 1; 502.10 (B) (2)
- NEC Article 502.10 (A) (2) & 502.30 (B) Class II Div. 1; 502.10 (B) (2) Class II Div. 2
- NEC Article 503.10 (A) (2) & 503.30 (B) Class III Div. 1; 503.10 (A) (2) Class III Div. 2





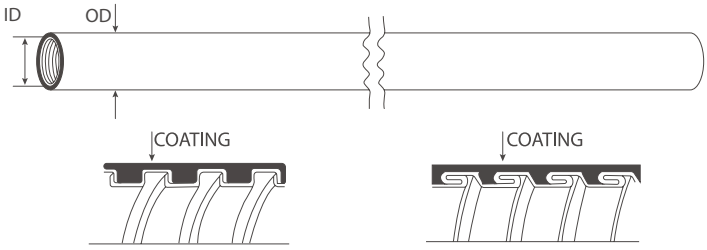

AMMO#	SIZE	ID		OD		ROLL	MEASUREMENT (L x W x H)	WEIGTH (lbs / coil)	INNER QTY.	MASTER QTY.	UPC
		MIN	MAX	MIN	MAX						
LTM-50UL	1/2"	.6"	.6"	.8"	.8"	100'	17.3" x 17.3" x 6.3"	30	-	100'	840526206131
LTM-75UL	3/4"	.8"	.8"	1.0"	1.1"	100'	19.7" x 19.7" x 7.1"	37	-	100'	840526206148
LTM-100UL	1"	1.0"	1.1"	1.3"	1.3"	100'	23.6" x 23.6" x 11.8"	52	-	100'	840526206155
LTM-125UL	1-1/4"	1.4"	1.6"	1.6"	1.7"	50'	29.5" x 29.5" x 5.1"	33	-	50'	840526206162
LTM-150UL	1-1/2"	1.6"	1.6"	1.9"	1.9"	50'	29.5" x 29.5" x 9.8"	51	-	50'	840526206179
LTM-200UL	2"	2.0"	2.0"	2.3"	2.4"	25'	35.4" x 35.4" x 4.7"	58	-	50'	840526206186
LTM-250UL	2-1/2"	2.5"	2.5"	2.8"	2.9"	25'	39.4" x 39.4" x 5.9"	43	-	25'	840526206193
LTM-300UL	3"	3.1"	3.1"	3.5"	3.5"	25'	43.3" x 43.3" x 7.1"	58	-	25'	840526206209
LTM-350UL	3-1/2"	3.5"	3.5"	4.0"	4.0"	25'	44.3" x 44.3" x 5.1"	68	-	25'	840526206216
LTM-400UL	4"	4.0"	4.0"	4.5"	4.5"	25'	44.3" x 44.3" x 9.1"	80	-	25'	840526206223

Ammo International Inc.

1000 COMMERCE CENTER DR ELKTON MD 21921
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com