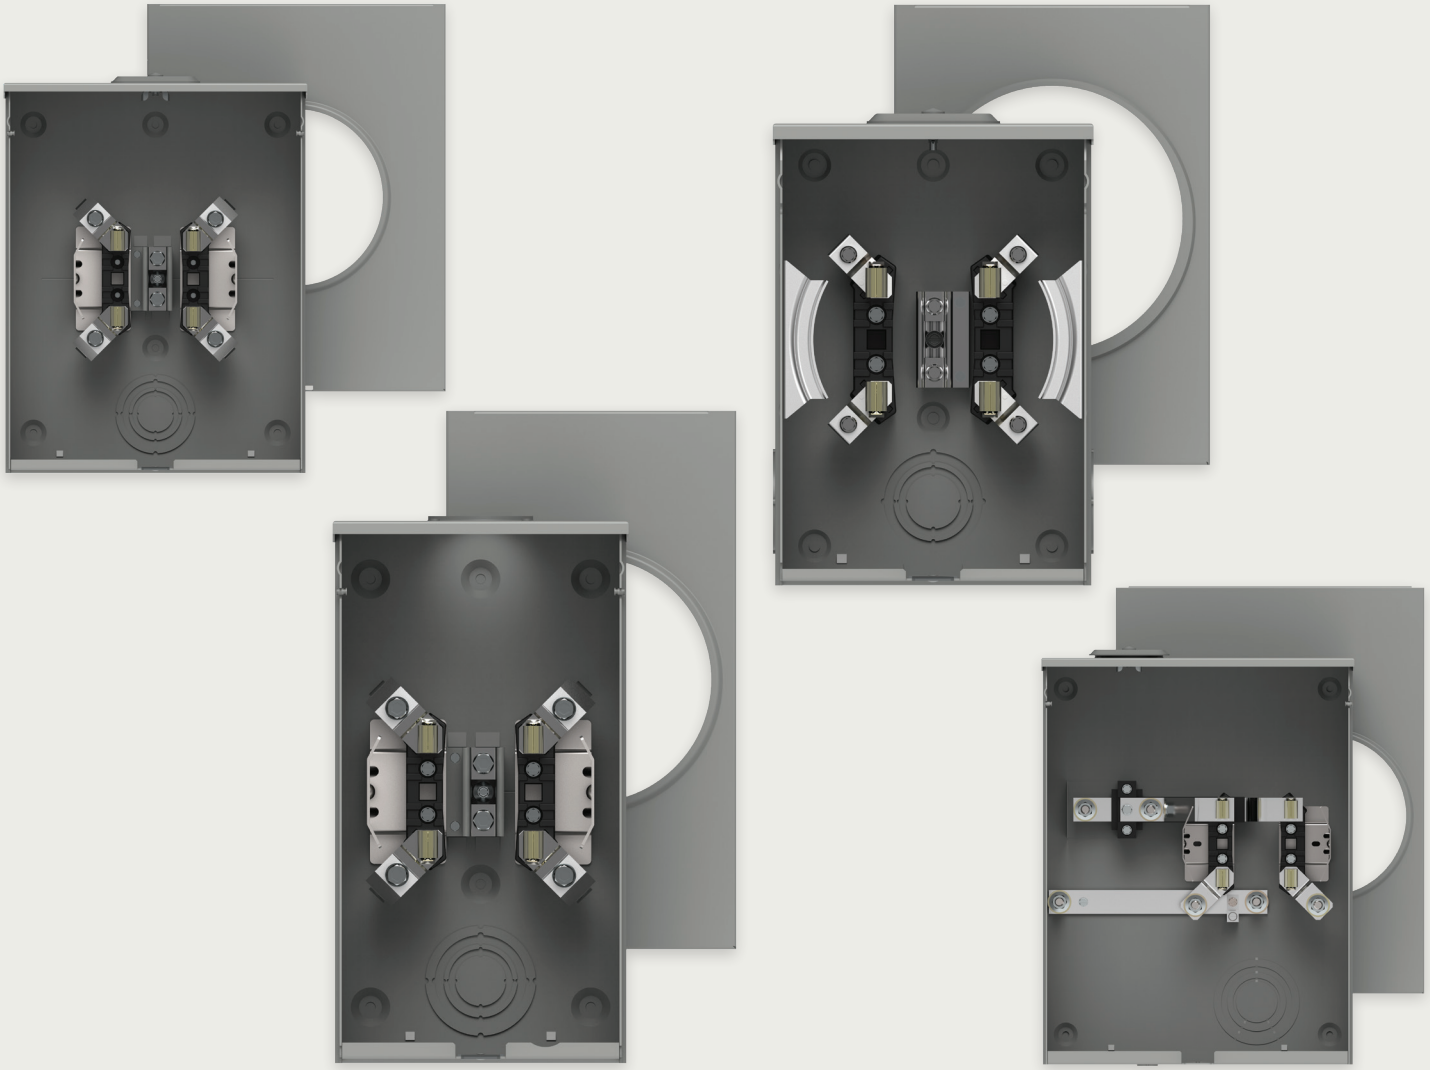


RESIDENTIAL PORTFOLIO CROSS REFERENCE AND SELECTION GUIDE

Single Family Metering

UAT and UAS families

usa.siemens.com/residential

SIEMENS is introducing the remodeled and improved UAT and UAS Single Metering line.
Our updated portfolio consolidates solutions and makes the selection process easier.

We certainly continue with our quality standard and solutions that meet diverse demands.This catalog and Cross Reference and Selection Guide guide is meant to serve as a guidance to the various SIEMENS meter socket products inside well known families UAT and UAS while providing you with a listing of our most common catalog numbers for each family.If you need help our network of utility distribution and sales team will be happy to assist you in determining the right socket for you.

We've made every effort to make this catalog easy to use and understand.
Please read the notes for the correct Cross Reference understanding.

SIEMENS

UAT111 Family:

- Ringless Type Meter Socket
- 135A Continuous, 135A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted Steel Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral 2/0 - 14 AWG; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	**Notes**	**5th Jaw Kit**	**Hub Kit**
UAT111-XGF	None	None	EC659-0121	N/A	UAT111-XG	None	N/A	N/A
					UAT111-XMF	1	EC659-0121	N/A
					UAT111-0GF	None	N/A	N/A
					SUAT111-0GF	None	N/A	N/A
					HUAT111-0GF	None	N/A	N/A
					UAT111-0G	None	N/A	N/A
					SUAT111-0G	None	N/A	N/A
					HUAT111-0G	None	N/A	N/A
					UAT111-0GIN	None	N/A	N/A
					SUAT111-0MXA	1	EC659-0121	N/A
					SUAT111-BG	2	N/A	EC38597-2
					UAT111-BG	2	N/A	EC38597-2
					UAT111-0JCA	None	N/A	N/A
					HUAT111-0JCA	None	N/A	N/A
					SUAT111-0JCA	None	N/A	N/A
					UAT111-AG	2	N/A	EC38596-2
					UAT111-APQG	2	N/A	EC38596-2
					SUAT111-PG	6	N/A	N/A
					UAT111-DG	2	N/A	EC38599-2
UAT111-XD	None	7/16”	EC659-0121	N/A	UAT111-0MXA	1	EC659-0121	N/A
					HUAT111-0MXA	1	EC659-0121	N/A
					SUAT111-BMXA	1, 2	EC659-0121	EC38597-2
					UAT111-BMXA	1, 2	EC659-0121	EC38597-2

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.

2 Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.

6 New meter socket is for Overhead and Underground Service, old one was for Underground only.

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT111-XE	None	7/8″	EC659-0121	N/A	UAT111-0FGIN	None	N/A	N/A
					UAT111-BBBU	1, 2	EC659-0121	EC38597-2
					UAT111-0GFP	3	N/A	N/A
UAT111-XPCV	Horn Bypass	None	EC659-0121	N/A	UAT111-0PQG	None	N/A	N/A
					SUAT111-0PQG	None	N/A	N/A
					HUAT111-0PQG	None	N/A	N/A
					SUAT111-0PGP	None	N/A	N/A
					UAT111-0PDN	None	N/A	N/A
					HUAT111-0PDN	None	N/A	N/A
					SUAT111-0PDN	None	N/A	N/A
					UAT111-0PCN	3	N/A	N/A
					UAT111-0P	None	N/A	N/A
					SUAT111-0P	None	N/A	N/A
					UAT111-0PZ	None	N/A	N/A
					UAT111-BPCC	2, 3	N/A	EC38597-2
					UAT111-BPQG	2	N/A	EC38597-2
					SUAT111-BPQG	2	N/A	EC38597-2
					UAT111-BPDN	2	N/A	EC38597-2
					UAT111-PPCC	3, 6	N/A	N/A
					UAT111-PH	6	N/A	N/A
					UAT111-CP	2	N/A	EC38598-2
					UAT111-XPQG	None	N/A	N/A
UAT111-XPD	Horn Bypass	7/16″	EC659-0121	N/A	UAT111-0PZA	None	N/A	N/A
					HUAT111-0PZA	None	N/A	N/A
					SUAT111-0PZA	None	N/A	N/A
					UAT111-BPZA	2	N/A	EC38597-2
UAT111-XPE	Horn Bypass	7/8″	EC659-0121	N/A	UAT111-0PGP	None	N/A	N/A
					HUAT111-0PGP	None	N/A	N/A
					HUAT111-0MSP	1	EC659-0121	N/A
					SUAT111-0MSP	1	EC659-0121	N/A
					UAT111-0MSP	1	EC659-0121	N/A
					SUAT111-0PV	1	EC659-0121	N/A
					UAT111-XMBL	1, 2	EC659-0121	N/A
					SUAT111-XMBL	1, 2	EC659-0121	N/A
					UAT111-BPGP	2	N/A	EC38597-2

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.

2 Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.

3 Original meter socket had utility specific identification labeling. New one will not.

6 New meter socket is for Overhead and Underground Service, old one was for Underground only.

UAT115 Family:

- Ringless Type Meter Socket
- 150A Continuous, 150A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted Steel Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral 2/0 - 14 AWG; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT115-0G	None	None	EC659-0121	N/A	UAT115-0GBA	None	N/A	N/A

UAT121 Family:

- Ring Type Meter Socket
- 135A Continuous, 135A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted Steel Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Mater Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral 2/0 - 14 AWG; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT121-0GWR	None	None	EC659-0121	Cover attaches via slider latch behind meter	UAT121-0BCO	1	EC659-0121	N/A
					SUAT121-0BCO	1	EC659-0121	N/A
					UAT121-BBCO	1, 2	EC659-0121	EC38597-2
					SUAT121-BBCO	1, 2	EC659-0121	EC38597-2
					SUAT121-PBCO	1, 6	EC659-0121	N/A
					UAT121-PBCO	1, 6	EC659-0121	N/A
					SUAT121-0GWR	None	N/A	N/A
					SUAT121-PGWR	6	N/A	N/A
					UAT121-PGWR	6	N/A	N/A
					SUAT121-BGWR	2	N/A	EC38597-2
					UAT121-BGWR	2	N/A	EC38597-2
UAT121-XGSP	None	None	EC659-0121	Cover attaches via 2 brackets with screws behind meter	HUAT121-0B	1	EC659-0121	N/A
					UAT121-0GIN	None	N/A	N/A
					SUAT121-BM	1, 2	EC659-0121	EC38597-2
					UAT121-BM	1, 2	EC659-0121	EC38597-2
					UAT121-BGCN	2	N/A	EC38597-2

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.

2 Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.

6 New meter socket is for Overhead and Underground Service, old one was for Underground only.

UAT131 Family:

- Ringless Type Meter Socket
- 135A Continuous, 135A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Aluminum Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Mater Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral 2/0 - 14 AWG; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT131-XGF	None	None	EC659-0121	N/A	UAT131-PJSP	6	N/A	N/A
					UAT131-0G	None	N/A	N/A
					UAT131-0GF	None	N/A	N/A
UAT131-0PQG	Horn Bypass	None	EC659-0121	N/A	N/A	N/A	N/A	N/A
UAT131-0PGP	Horn Bypass	7/8”	EC659-0121	N/A	UAT131-BPGP	2	N/A	EC38597-2

2 Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.

6 New meter socket is for Overhead and Underground Service, old one was for Underground only.

UAT151 Family:

- Ringless Type Meter Socket
- 135A Continuous, 135A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted Aluminum Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Mater Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral 2/0 - 14 AWG; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT151-0G	None	None	EC659-0121	N/A	UAT151-B0DT	2, 3	N/A	EC38597-2
					UAT151-D0DT	2, 3	N/A	EC38599-2

2 Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.

3 Original meter socket had utility specific identification labeling. New one will not.

UAT314 Family:

- Ringless Type Meter Socket
- 160A Continuous, 200A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted Steel Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead Service Only
- RX Type Hub Opening
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT314-0G	None	None	EC659-0121	N/A	HUAT314-0G	None	N/A	N/A
					UAT314-BG	2	N/A	EC38597-2
UAT314-0GD	None	7/16"	EC659-0121	N/A	N/A	N/A	N/A	N/A
UAT314-0PRG	Horn Bypass	7/8"	EC659-0121	N/A	HUAT314-0PRG	None	N/A	N/A

2 Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.

UAT317 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead Service Only
- RX Type Hub Opening
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT317-0GF	None	None	EC659-0121	N/A	UAT317-0G	None	N/A	N/A
					SUAT317-0G	None	N/A	N/A
					SUAT317-0GF	None	N/A	N/A
					UAT317-DG	2	N/A	EC38599-2
					UAT317-0GSA	3	N/A	N/A
					SUAT317-DGZ	2	N/A	EC38599-2
					HUAT317-0G	None	N/A	N/A
					HUAT317-0GF	None	N/A	N/A
					UAT317-BGCR	2, 3	N/A	EC38597-2
					UAT317-BMCR	1, 2, 3	EC659-0121	EC38597-2
					UAT317-D0CB	2	N/A	EC38599-2
					UAT317-DGAB	2, 3	N/A	EC38599-2
					UAT317-EG	2	N/A	EC38600-2

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.
2 Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.
3 Original meter socket had utility specific identification labeling. New one will not.

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT317-0GF	None	None	EC659-0121	N/A	UAT317-EGCR	2, 3	N/A	EC38600-2
					UAT317-EMCR	1, 2, 3	EC659-0121	EC38600-2
UAT317-0E	None	7/8"	EC659-0121	N/A	N/A	N/A	N/A	N/A
UAT317-0PDN	Horn Bypass	None	EC659-0121	N/A	UAT317-DPCC	2, 3	N/A	EC38599-2
					UAT317-0PCH	None	N/A	N/A
					UAT317-0PQG	None	N/A	N/A
					SUAT317-0PQG	None	N/A	N/A
					HUAT317-0PCH	None	N/A	N/A
					HUAT317-0PDN	None	N/A	N/A
					HUAT317-0PQG	None	N/A	N/A
					HUAT317-0PRG	None	N/A	N/A
					SUAT317-0MSP	1	EC659-0121	N/A
					SUAT317-0PDN	None	N/A	N/A
					UAT317-0PCN	None	N/A	N/A
					UAT317-0PCV	None	N/A	N/A
					UAT317-DPQG	2	N/A	EC38599-2
UAT317-0PGP	Horn Bypass	7/8"	EC659-0121	N/A	UAT317-0FP	1	EC659-0121	N/A
					HUAT317-0FP	1	EC659-0121	N/A
					SUAT317-0FP	1	EC659-0121	N/A
					SUAT317-0PGP	None	N/A	N/A
					HUAT317-0PGP	None	N/A	N/A
					UAT317-0MSP	1	EC659-0121	N/A
					UAT317-DPGP	2	N/A	EC38599-2
					UAT317-DVZ	1, 2	EC659-0121	EC38599-2
UAT317-0PZA	Horn Bypass	7/16"	EC659-0121	N/A	HUAT317-0PZA	None	N/A	N/A
					SUAT317-0PZA	None	N/A	N/A
					UAT317-DPZA	2	N/A	EC38599-2
					UAT317-DGCP	2	N/A	EC38599-2
					UAT317-DMXA	1, 2	EC659-0121	EC38599-2
					UAT317-DBBU	1, 2	EC659-0121	EC38599-2
					HUAT317-0MSP	1	EC659-0121	N/A
					UAT317-0MXA	1	EC659-0121	N/A
					SUAT317-0MXA	1	EC659-0121	N/A
					HUAT317-0MXA	1	EC659-0121	N/A

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.

2 Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.

3 Original meter socket had utility specific identification labeling. New one will not.

UAT327 Family:

- Ring Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead Service Only
- RX Type Hub Opening
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT327-0G	None	None	EC659-0121	Cover attaches via slider latch behind meter	UAT327-0MCO	1	EC659-0121	N/A
					SUAT327-0MCO	1	EC659-0121	N/A
					HUAT327-0B	1	EC659-0121	N/A
					UAT327-0B	1	EC659-0121	N/A
					UAT327-0GSP	4	N/A	N/A
					UAT327-0GWR	4	N/A	N/A
					SUAT327-0GWR	4	N/A	N/A
					UAT327-DGME	2, 4	N/A	EC38599-2

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.
2 Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.
4 Original meter socket's cover attaches via 2 brackets with screws behind meter.
New meter socket's cover will attach via slider latch behind meter.

UAT337 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Aluminum Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead Service Only
- RX Type Hub Opening
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT337-0GF	None	None	EC659-0121	N/A	UAT337-0G	None	N/A	N/A
					UAT337-DG	2	N/A	EC38599-2
					UAT337-DGCP	2	N/A	EC38599-2
					UAT337-DPGP	2	N/A	EC38599-2
					UAT356-DGCF	8	N/A	EC38599-2
UAT337-0PQG	Horn Bypass	None	EC659-0121	N/A	N/A	N/A	N/A	N/A
UAT337-0PGP	Horn Bypass	7/8"	EC659-0121	N/A	N/A	N/A	N/A	N/A

2 Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.
8 Original meter socket was rated 160A Continuous, 200 A Max., 600V AC, new one is rated 200A Continuous, 250A Max., 600V AC

UAT411 Family:

- Ringless Type Meter Socket
- 135A Continuous, 135A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load: #14 - 2/0 AWG; Neutral: #6 - 350 MCM; Ground: #2 - 14 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT411-XG	None	None	EC659-0121	N/A	N/A	N/A	N/A	N/A
UAT411-XP	Horn Bypass	None	EC659-0121	N/A	UAT411-XVZ	1	EC659-0121	N/A

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.

UAT414 Family:

- Ringless Type Meter Socket
- 160A Continuous, 200A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT414-0G	None	None	EC659-0121	N/A	UAT414-0GBA	None	N/A	N/A

UAT417 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT417-XGF	None	None	EC659-0121	N/A	UAT417-XG	None	N/A	N/A
					SUAT417-XG	None	N/A	N/A
					HUAT417-XG	None	N/A	N/A
					SUAT417-XGF	None	N/A	N/A
					UAT417-XGCW	None	N/A	N/A
					UAT417-XGDU	None	N/A	N/A
					HUAT417-XGDU	None	N/A	N/A
					SUAT417-XGDU	None	N/A	N/A
					UAT417-XGD	None	N/A	N/A
					UAT417-XGJM	None	N/A	N/A
					UAT417-XMDU	1	EC659-0121	N/A
					UAT417-XMF	1	EC659-0121	N/A
					UAT417-X0TX	None	N/A	N/A
					UAT417-0G	None	N/A	N/A
					HUAT417-0G	None	N/A	N/A
					UAT417-0GF	None	N/A	N/A
					HUAT417-0GF	None	N/A	N/A
					UAT417-0GFP	None	N/A	N/A
					UAT417-0GEC	None	N/A	N/A
					UAT417-0GEE	None	N/A	N/A
					UAT417-0GSU	None	N/A	N/A
					UAT417-PG	6	N/A	N/A
					SUAT417-PG	6	N/A	N/A
					UAT417-PGF	6	N/A	N/A
					UAT417-PGEE	6	N/A	N/A
					UAT417-DG	2	N/A	EC38599-2
					UAT417-EG	2	N/A	EC38600-2
UAT417-XD	None	7/16”	EC659-0121	N/A	UAT417-X0XA	1	EC659-0121	N/A
					UAT417-P0XA	1	EC659-0121	N/A
					HUAT417-X0XA	1	EC659-0121	N/A
UAT417-XE	None	7/8”	EC659-0121	N/A	N/A	N/A	N/A	N/A
UAT417-XPD	Horn Bypass	7/16”	EC659-0121	N/A	N/A	N/A	N/A	N/A

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.

2 Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.

6 New meter socket is for Overhead and Underground Service, old one was for Underground only.

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT417-XPE	Horn Bypass	7/8"	EC659-0121	N/A	HUAT417-0MSP	1	EC659-0121	N/A
					SUAT417-0MSP	1	EC659-0121	N/A
					UAT417-0MSP	1	EC659-0121	N/A
UAT417-XMBL	Horn Bypass	7/8"	EC659-0121	Extra secure bracing	N/A	N/A	N/A	N/A
UAT417-XPQG	Horn Bypass	None	EC659-0121	N/A	UAT417-0PQG	None	N/A	N/A
					HUAT417-0PQG	None	N/A	N/A
					SUAT417-0PQG	None	N/A	N/A
					UAT417-0PRG	None	N/A	N/A
					HUAT417-0PRG	None	N/A	N/A
					UAT417-0P	None	N/A	N/A
					UAT417-0PZ	None	N/A	N/A
					SUAT417-XPQG	None	N/A	N/A
					HUAT417-XPQG	None	N/A	N/A
					SUAT417-XPDG	None	N/A	N/A
					SUAT417-XPCV	None	N/A	N/A
					UAT417-XPCV	None	N/A	N/A
					SUAT417-XFP	1	EC659-0121	N/A
					UAT417-XFP	1	EC659-0121	N/A
					SUAT417-XMBL	1	EC659-0121	N/A
					UAT417-XVZ	1	EC659-0121	N/A
					UAT417-PPQG	6	N/A	N/A
					UAT417-PPCV	6	N/A	N/A
					SUAT417-PPDN	6	N/A	N/A
					UAT417-PPDN	6	N/A	N/A

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.
6 New meter socket is for Overhead and Underground Service, old one was for Underground only.

UAT427 Family:

- Ring Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT427-XGSP	None	None	EC659-0121	Cover attaches via 2 brackets with screws behind meter	UAT427-0G	5	N/A	N/A
					UAT427-XG	5	N/A	N/A
					UAT427-XGME	None	N/A	N/A
					UAT427-XMWR	5	N/A	N/A
					SUAT427-XMWR	5	N/A	N/A
					UAT427-EB	1, 2	EC659-0121	EC38600-2
					UAT427-PG	6	N/A	N/A

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.
2 Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.
5 Original meter socket's cover attaches via slider latch behind meter. New meter socket's cover will attach via 2 brackets with screws behind meter.
6 New meter socket is for Overhead and Underground Service, old one was for Underground only.

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT427-XGSP	None	None	EC659-0121	Cover attaches via 2 brackets with screws behind meter	UAT427-PB	1, 5, 6	EC659-0121	N/A
					HUAT427-PB	1, 5, 6	EC659-0121	N/A
					UAT427-PMCO	1, 6	EC659-0121	N/A
					SUAT427-PMCO	1, 6	EC659-0121	N/A
					UAT427-PGEG	6	N/A	N/A

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.
5 Original meter socket's cover attaches via slider latch behind meter. New meter socket's cover will attach via 2 brackets with screws behind meter.
6 New meter socket is for Overhead and Underground Service, old one was for Underground only.

UAT437 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Aluminum Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- RX Type Hub Opening and Cover Plate Installed
- For Overhead or Underground Service
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT437-XGF	None	None	EC659-0121	N/A	UAT434-0G	8	N/A	N/A
					UAT434-PG	6, 8	N/A	N/A
					UAT437-XG	None	N/A	N/A
					UAT437-0G	None	N/A	N/A
					UAT437-0GF	None	N/A	N/A
					UAT437-PG	6	N/A	N/A
					UAT437-PGF	6	N/A	N/A
					UAT43K-0G	None	N/A	N/A
UAT437-0PGP	Horn Bypass	7/8"	EC659-0121	N/A	N/A	N/A	N/A	N/A

6 New meter socket is for Overhead and Underground Service, old one was for Underground only.
8 Original meter socket was rated 160A Continuous, 200 A Max., 600V AC, new one is rated 200A Continuous, 250A Max., 600V AC

UAT457 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted Aluminum Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT457-XG	None	None	EC659-0121	N/A	UAT457-PGF	6	N/A	N/A

6 New meter socket is for Overhead and Underground Service, old one was for Underground only.

UAT61 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT618-XGNM	None	7/8″	EC659-0121	3/8″ Studs Line Side	SUAT618-XGNM	None	N/A	N/A
UAT619-XG	None	7/8″	EC659-0121	3/8″ Studs Line and Load Side	N/A	N/A	N/A	N/A
UAT61A-XG	None	7/8″	EC659-0121	Double Barrel Lugs (Load and Neutral Side)	N/A	N/A	N/A	N/A
UAT61A-XPPB	Horn Bypass	None	EC659-0121	N/A	SUAT61A-XPPB	None	N/A	N/A

UAT77 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #8 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT777-XGF	None	None	EC659-0121	Offset	UAT777-XG	None	N/A	N/A
					UAT778-PGNV	6	N/A	N/A
UAT777-XPG	Horn Bypass	None	EC659-0121	Offset	N/A	N/A	N/A	N/A

6 New meter socket is for Overhead and Underground Service, old one was for Underground only.

UAT817 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead or Underground Service*
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT817-XGD	None	7/16”	EC659-0121	N/A	N/A	N/A	N/A	N/A
UAT817-XGBA	None	None	EC659-0121	N/A	UAT817-XGSE	3	N/A	N/A
UAT817-XPCC	Horn Bypass	None	EC659-0121	* For Underground Service Only	UAT817-XVZKCPL	1, 7	EC659-0121	N/A
					UAT817-PPCC	6	N/A	N/A

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.
3 Original meter socket had utility specific identification labeling. New one will not.
6 New meter socket is for Overhead and Underground Service, old one was for Underground only.
7 New meter socket is for Underground Service only, old one was for Overhead or Underground.

UAT837 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Aluminum Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead or Underground Service
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAT837-XGSE	None	None	EC659-0121	N/A	N/A	N/A	N/A	N/A

UAS27 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Underground Service Only
- RX Type Hub Opening and Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground # 14 - 2 AWG *

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAS277-PGNV	None	None	EC659-0121	Mechanical Lugs *, Interior moved up	N/A	N/A	N/A	N/A
UAS278-PG	None	None	EC659-0121	3/8" Studs Line and Load Side, Interior moved up	UAS27A-PG	None	N/A	N/A

UAS817 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Underground Service Only
- RX Type Hub Opening
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAS817-PG	None	None	EC659-0121	N/A	N/A	N/A	N/A	N/A
UAS817-PPCV	Horn Bypass	None	EC659-0121	N/A	N/A	N/A	N/A	N/A
UAS817-PD	None	7/16"	EC659-0121	N/A	UAS817-P0XA	1	EC659-0121	N/A
UAS817-PPGP	Horn Bypass	7/8"	EC659-0121	N/A	UAS817-PFP	1	EC659-0121	N/A
					SUAS817-PPGP	None	N/A	N/A
					HUAS817-PPGP	None	N/A	N/A
UAS817-PPZA	Horn Bypass	7/16"	EC659-0121	N/A	HUAS817-PPZA	None	N/A	N/A

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.

UAS818 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Underground Service Only
- RX Type Hub Opening
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAS818-PGNM	None	7/8″	EC659-0121	N/A	HUAS818-PGNM	None	N/A	N/A
					SUAS818-PGNM	None	N/A	N/A

UAS827 Family:

- Ring Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Aluminum Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Underground Service Only
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground #14 - 2 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAS827-PG	None	None	EC659-0121	N/A	N/A	N/A	N/A	N/A

UAS837 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Aluminum Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Underground Service Only
- RX Type Hub Opening
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; One Ground Lug #2 - 14 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAS837-XPG	Horn Bypass	None	EC659-0121	Cover Plate Installed	UAS837-PPG	N/A	N/A	N/A
					UAS837-PGCF	3	N/A	N/A
UAS837-XPGP	Horn Bypass	7/8″	EC659-0121	Cover Plate Installed	N/A	N/A	N/A	N/A

3 Original meter socket had utility specific identification labeling. New one will not.

UAS877 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Underground Service Only
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; One Ground Lug #14 - 2/0 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAS877-PGF	None	None	EC659-0121	N/A	UAS877-PG	None	N/A	N/A
					SUAS877-PG	None	N/A	N/A
					HUAS877-PG	None	N/A	N/A
UAS877-PPGP	Horn Bypass	7/8”	EC659-0121	N/A	UAS877-PMBL	1	EC659-0121	N/A
					SUAS877-PPGP	None	N/A	N/A
					HUAS877-PPGP	None	N/A	N/A
UAS877-PPZA	Horn Bypass	7/16”	EC659-0121	N/A	SUAS877-PPZA	None	N/A	N/A
					HUAS877-PPZA	None	N/A	N/A
UAS877-XG	None	None	EC659-0121	RX Type Hub Opening with Cover Plate Installed	N/A	N/A	N/A	N/A
UAS877-XPG	Horn Bypass	None	EC659-0121	RX Type Hub Opening with Cover Plate Installed	UAS877-PPDN	None	N/A	N/A
					UAS877-PPCV	None	N/A	N/A
					SUAS877-PPZ	None	N/A	N/A
					HUAS877-PPDN	None	N/A	N/A
					SUAS877-PPCV	None	N/A	N/A
					SUAS877-PPDN	None	N/A	N/A
					UAS877-PPCN	None	N/A	N/A

1 Original meter socket had factory installed the 5th jaw. New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.

UAS887 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Aluminum Enclosure
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Underground Service Only
- RX Type Hub Opening with Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; One Ground Lug #14 - 2/0 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAS887-XPGP	Horn Bypass	7/8”	EC659-0121	N/A	N/A	N/A	N/A	N/A

UAS917 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead or Underground Service
- RX Type Hub Opening, Two Cover Plates Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Two Ground Lugs #14 - 2/0 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAS917-XJCA	None	None	EC659-0121	N/A	UAS917-0G	None	N/A	N/A
					SUAS917-XJCA	None	N/A	N/A
					HUAS917-XJCA	None	N/A	N/A
					UAS917-0GLE	None	N/A	N/A
					UAS917-0GSK	None	N/A	N/A
					UAS917-PG	6	N/A	N/A
					UAS917-PGNV	6	N/A	N/A

6 New meter socket is for Overhead and Underground Service, old one was for Underground only.

UAS979 Family:

- Ringless Type Meter Socket
- 200A Continuous, 250A Max., 600V AC
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- 4 Jaw Meter Socket
- For Overhead and Underground Service
- RX Type Hub Opening, Cover Plate Installed
- Stainless Steel Latch and Hasp
- Line, Load, Neutral #6 - 350 kcmil; Ground Lug #14 - 2/0 AWG

New Meter Socket	Bypass	Barrel Lock Provision	5th Jaw Kit	Other Features	Cross Reference			
					Previous Meter Socket	Notes	5th Jaw Kit	Hub Kit
UAS979-XG	None	None	EC659-0121	N/A	N/A	N/A	N/A	N/A

Cross Reference Guide Notes:

Note 1
Original meter socket had factory installed the 5th jaw.
New one has 4 jaws, but the 5th jaw kit can be ordered and installed in the field.

Note 2
Original meter socket had a hub installed. For the new one, Hub Kit needs to be ordered and installed in the field.

Note 3
Original meter socket had utility specific identification labeling. New one will not.

Note 4
Original meter socket's cover attaches via 2 brackets with screws behind meter.
New meter socket's cover will attach via slider latch behind meter.

Note 5
Original meter socket's cover attaches via slider latch behind meter.
New meter socket's cover will attach via 2 brackets with screws behind meter.

Note 6
New meter socket is for Overhead and Underground Service, old one was for Underground only.

Note 7
New meter socket is for Underground Service only, old one was for Overhead or Underground.

Note 8
Original meter socket was rated 160A Continuous, 200 A Max., 600V AC, new one is rated 200A Continuous, 250A Max., 600V AC.

Legal Manufacturer

Siemens Industry, Inc.
3617 Parkway Ln
Peachtree Corners, GA 30092
United States of America

Telephone: +1 (800) 333-7421
www.usa.siemens.com/residential

Order No. RPSA-UATS-0523
© 05.2023, Siemens Industry, Inc.

This document contains a general description of available technical options only, and its effectiveness will be subject to specific variables including field conditions and project parameters. Siemens does not make representations, warranties, or assurances as to the accuracy or completeness of the content contained herein. Siemens reserves the right to modify the technology and product specifications in its sole discretion without advance notice.

© 2023 by Siemens Industry, Inc.