

SH 1/1 | REV A | WINDCHILL VERSION A.1

ITEM #	PART #	QTY	DESCRIPTION
1	0D7294	1	XFER SW-W 400A600V2P
2	0A7822	6	LUG SLDLSS 600/250-1/0X1/4-28
3	0A8261	12	SCREW HHC 1/4-28 X 5/8 .625TH
4	022473	12	WASHER FLAT 1/4-M6 ZINC
5	026902	7	SCREW HHTT #8-32 X 1/4 CZ
6	0C7907J	2	COVER LUG 2P 300/400AMP
7	0C8275	4	SCREW PPHM M4-0.7 X 10 SEMS
8	090388	3	SCREW HHTT M6-1.0 X 12 ZINC
9	022097	15	WASHER LOCK M6-1/4
10	062707	2	LUG SLDLSS 250-#6 X 11MM AL/CU
11	0C3168	2	WASHER LOCK SPECIAL 5/16
12	0H6559	2	NUT HEX FL WHIZ 5/16-18
* 13	0D2572	1	FUSEBLOCK 30A 600V 3POS W/SQ
14	073590A	3	FUSE 5A X BUSS
15	0A1495	4	SCREW HHTT M4-0.7 X 10 BP
* 16	0D7393T	1	TERM BLOCK 3P UL 12-20AWG
17	0L3068	2	SCREW THTT M3-0.5 X 25 ZP
* 18	0K0103	1	RELAY PNL 12VDC DPDT 10A@240VA
19	0F2659	2	SCREW HHTT M3-0.5 X 6 BP
20	0K1370	1	ASSY NEUTRAL BLK 300-400A
21	025087	2	SCREW HHTT 5/16-18 X 1.25 CZ
22	085296	2	SCREW HHC 1/4-20 X 1/2 SS
23	0F6165	2	WASHER M6 NYLON
24	0K13230STOR	1	ENCLOSURE 3R 400A XFRSW RAW
25	0K13240STOR	1	COVER, NEMA 3R XFER SW RAW
26	0K13250STOR	1	SUBPLATE 24/36 ENCL RTS RAW
27	0K1098	1	DECAL RTS TRANSFER SW GENERAC
28	0K1799C	1	DECAL DATA NON SE SW 400A
29	063321	1	HANDLE XFER SWITCH 1-400A
30	087680	1	NUT WING M6-1.0
31	064101	6	NUT HEX FL WHIZ 3/8-16
32	063378	4	HOLDER CABLE TIE
33	064761	4	TIE WRAP UL 5.6 X .10 NATL
34	091477	6	RIVET, WIRE DUCT MNT
35	091472	2'	DUCT WIRING 1X1.5
36	091472A	2'	COVER WIRE DUCT 1 IN
37	0A9457	1	DECAL, NEUTRAL
38	0D3587	1	DECAL, FUSE REPLACEMENT
39	0D4545	1	DECAL, MANUAL OPERATION
40	0F6129	1	DECAL TEST SEQUENCE 3P TS 3R
41	0G3259	2	DECAL TERMINAL SHOCK HZD BI
42	0H6389	1	DECAL UTILITY LOAD SENSE 240V
43	0H7270	1	CHANNEL SNAPTRACK 76.2 X 101.2
44	0L3123	1	ASSY SMART AC MOD
45	0H7274	1	DECAL NEC COMPLIANCE
46	0H7917	1	DECAL CUSTOMER CONN RTS
47	0L3248	1	WIRE HARNESS 400A RTS


* ITEMS INCLUDED WITH HARNESS *47

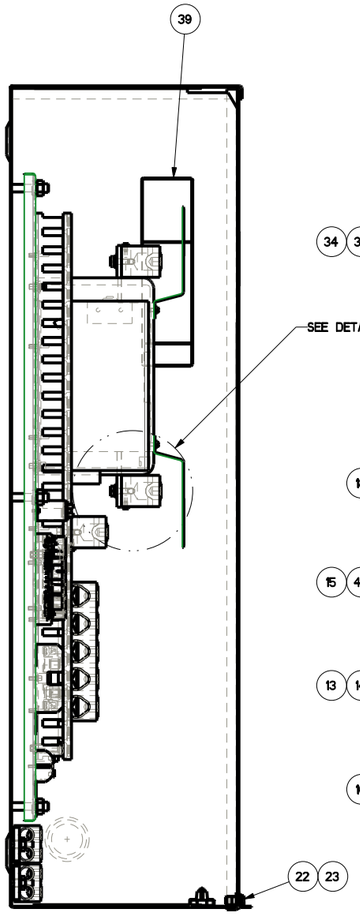


SECTION A-A

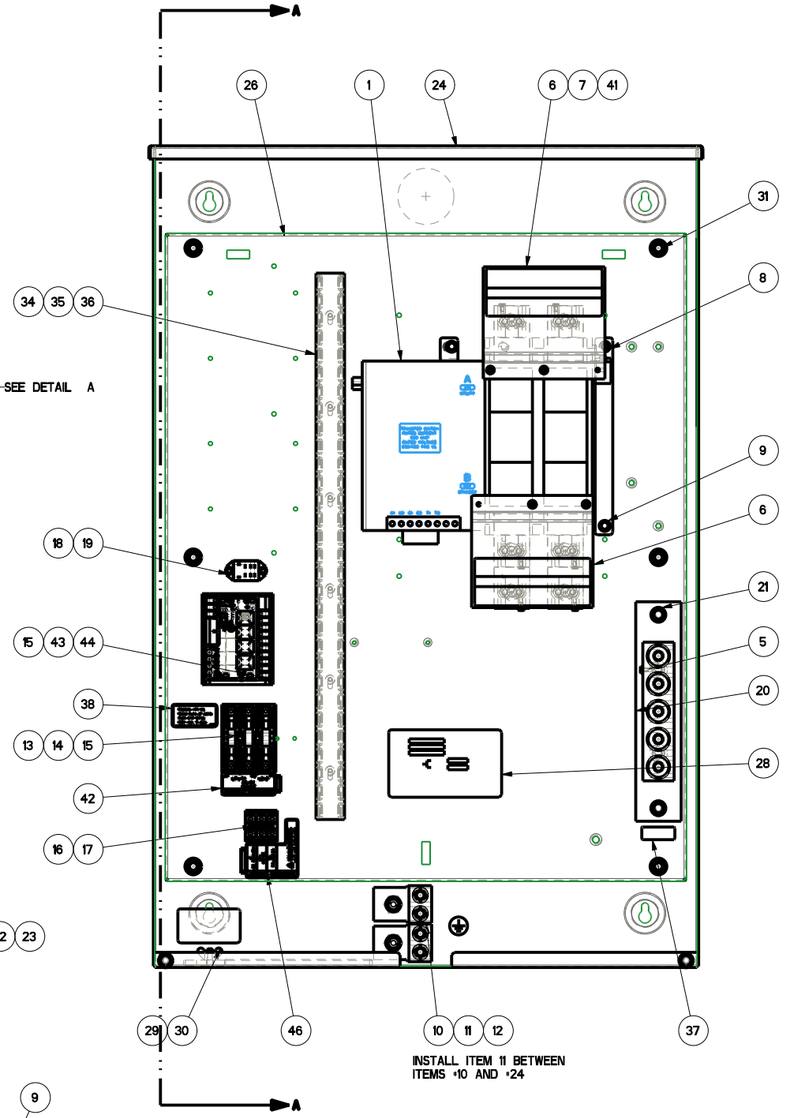

INSTALL ITEM 11 BETWEEN ITEMS *10 AND *24

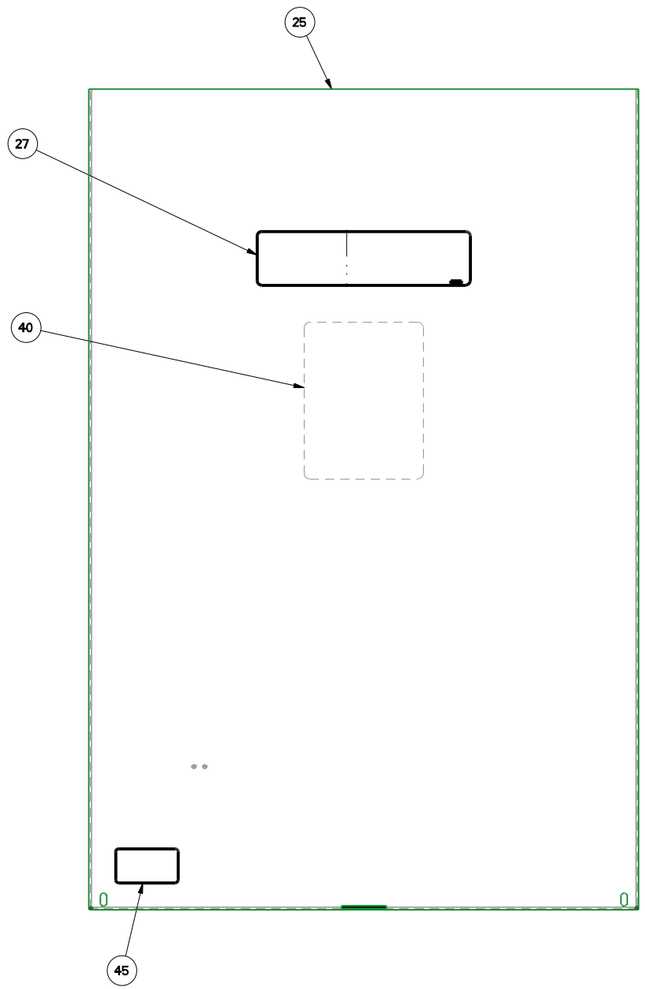

TORQUE MOUNTING SCREW TO 70 IN-LBS. (400A)



DETAIL A
SCALE 0.600

PART NUMBER	DESCRIPTION	ITEM * 27	ITEM * 28
0L3212	ASSEMBLY 400A NON XFER SW	0G5968C	PER MODEL
0L3212A	EXPLODED VIEW DRAWING	N/A	N/A
0L3212B	ASSEMBLY 400A NON XFER SW	0J3806C	0J3803

REFERENCE DRAWINGS

0L3243	SCHEMATIC/WIRING DIAGRAMS
0E0286	STYRENE PAD, 3" THK NEMA 3R CABNT
0F8056	CARTON, SHIPPING NEMA 3R ENCL
063626	SHIP PALLET 24X36 ENCLOSURE

DRAWING CREATED FROM PROENGINEER 3D FILE. ECO MODIFICATION TO BE APPLIED TO SOLID MODEL ONLY.

GENERAL TOLERANCES UNLESS NOTED

ALL XX : ± 0.4 MM
XXX : ± 0.4 MM
XXXX : ± 0.05 MM
ALL ANG : ± 1°

INTERPRET DIM AND TOL PER ASME Y14.5M-1994

THIRD ANGLE PROJECTION

GENERAC POWER SYSTEMS OWNS THE COPYRIGHT OF THIS DRAWING BUT SUPPLIES IT CONFIDENTIALLY AND NOT FOR PUBLICATION. IT MUST NOT BE COPIED WHICH IT IS SUPPLIED WITHOUT THE EXPRESS WRITTEN CONSENT OF GENERAC POWER SYSTEMS.
© GENERAC POWER SYSTEMS 2010

ELECTRONICALLY APPROVED INSIDE WINDCHILL

GENERAC

TITLE
ASSEMBLY DRAWING 400A
120/240V 1 PH TRANSFER SW

ISSUE DATE:

SIZE	CAGE NO	DWG NO	REV
D	N/A	0L3212$	A

SCALE 0.300 | WT-KG 22428238.31 | SHEET 1 of 1

GENERAL ASSEMBLY DRAWING