
Specification Sheet & Installation Instruction

Built-in screw-free adapter frame


THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

PRODUCT DIMENSIONS

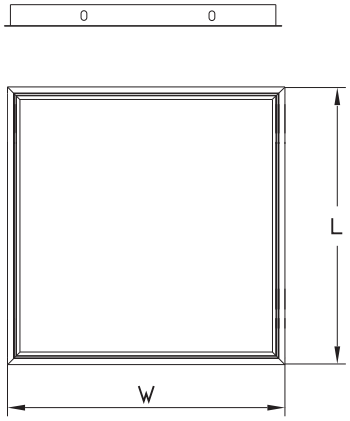

Size / Applicable Lamp Size / Dimensions	1'X4'	2'X2'	2'X4'
	1213X303X(9--45)mm 47.76"X11.93"X(0.35--1.77)"	603X603X(9--45)mm 23.74"X23.74"X(0.35-1.77)"	1213X603X(9--45)mm 47.76"X23.74"X(0.35--1.77)"
L	1255mm/49.41"	645mm/25.39"	1255mm/49.41"
W	345mm/13.58"	645mm/25.39"	645mm/25.39"

INSTALLATION INSTRUCTION

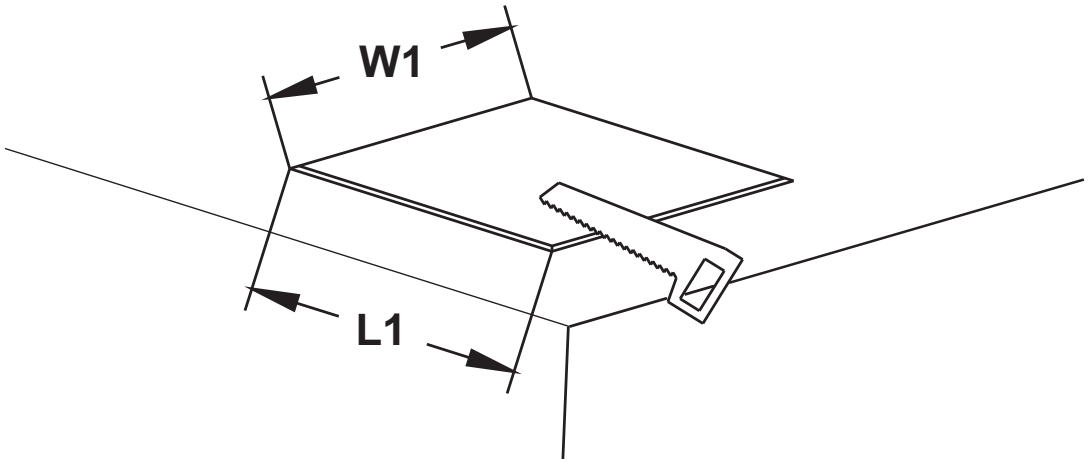



Cut-Out Size


Cut holes in the ceiling according to the corresponding size in the table


Hole Cut Dimensions / Size	1'X4'	2'X2'	2'X4'
L1	1236mm/48.66"	626mm/24.65"	1236mm/48.66"
W1	326mm/12.83"	626mm/24.65"	626mm/24.65"


INSTALLTION PROCEDUR

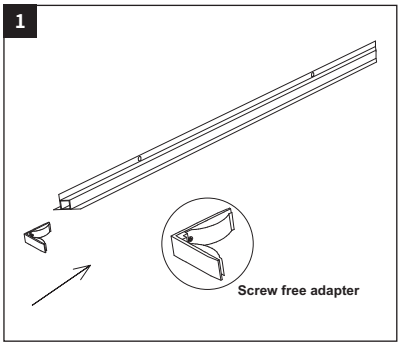


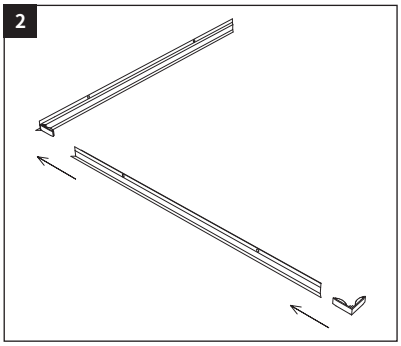


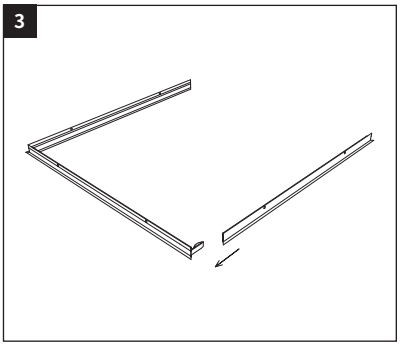


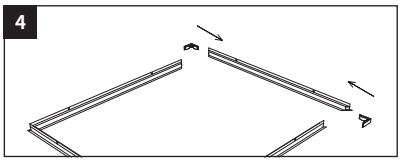


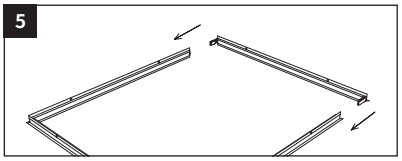


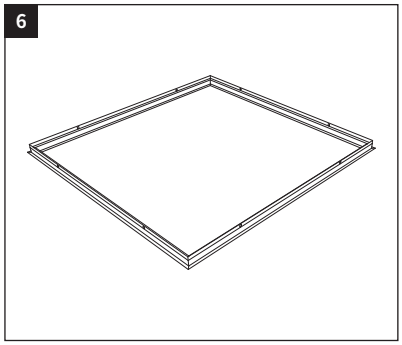


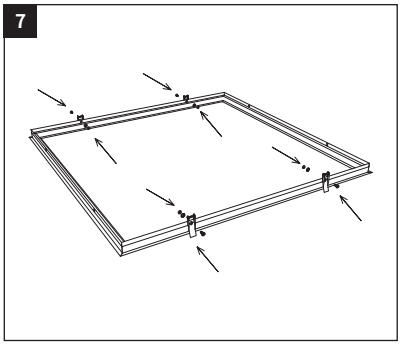


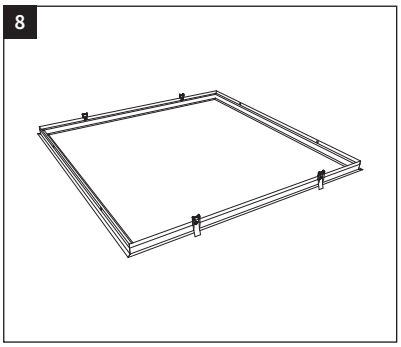


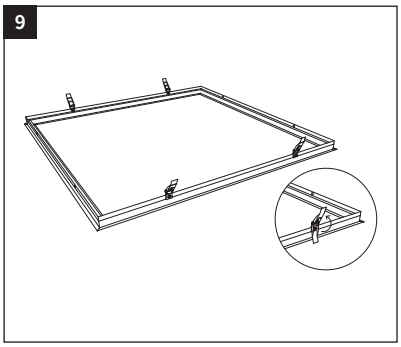

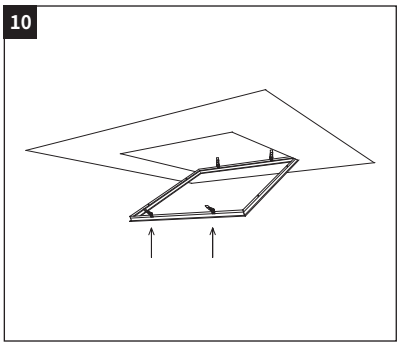

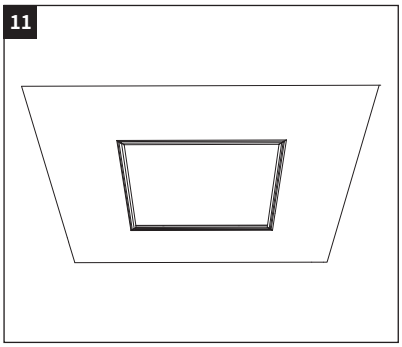

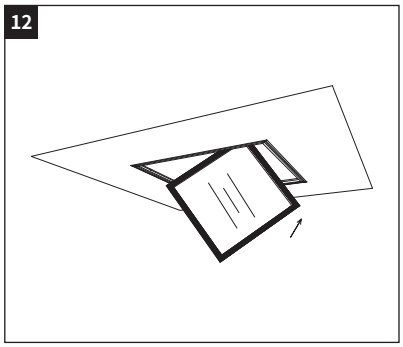

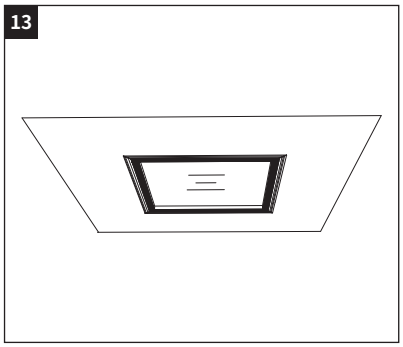

① Follow the Steps from 1 to 6 to install the adapter frame.

② Follow the Steps from 7 to 9 to install the Springs.
(After complete the assembly, check the elasticity of the spring is in line with the actual loading bearing)

③ Insert the assembled adapter frame into the hole that has been opened and secure it.

④ Connect the LED lamp to the power supply and put it into the frame of the corresponding size through the side Angle of the frame.

⑤ Make sure the frame and LED fixture are firmly fixed, turn on the power supply.

Note:

The ceiling used for installing lamps and lanterns must be firm and reliable! in case the lamps fall down!