

Steel masonry boxes

MASONRY BOXES


2½″ DEEP x 3¾″ HIGH
½″ & ¾″ CONCENTRIC KOs
UL LISTED



TP682



TP684

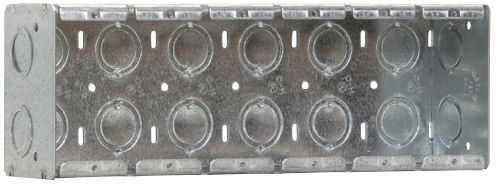


TP687

Cat. #	Gang	Width	Knockouts			Capacity cu. in.	Unit qty.	Wt. lbs. per 100
			Each end	Each side	Bottom			
TP682	1	1 15/16″	1	2	2	15.5	20	70
TP683	2	3¾″	2	2	4	31.0	10	103
TP684	3	5 9/16″	3	2	6	46.5	5	129
TP685	4	7⅜″	4	2	8	62.0	5	165
TP686	5	9 9/16″	5	2	10	77.5	5	189
TP687	6	11″	6	2	12	93.0	1	230

MASONRY BOXES


3½″ DEEP x 3¾″ HIGH
½″ & ¾″ CONCENTRIC KOs
UL LISTED




TP690



TP691

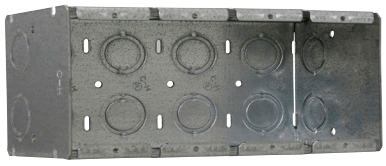

TP693

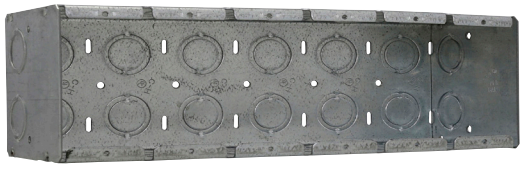

TP695

Cat. #	Gang	Width	Knockouts			Capacity cu. in.	Unit qty.	Wt. lbs. per 100
			Each end	Each side	Bottom			
TP690	1	1 15/16″	2	2	2	22.0	20	84
TP691	2	3¾″	4	2	4	44.0	10	120
TP692	3	5 9/16″	6	2	6	66.5	10	155
TP693	4	7⅜″	8	2	8	88.0	5	207
TP694	5	9 9/16″	10	2	10	110.0	5	235
TP695	6	11″	12	2	12	132.0	1	287

MASONRY BOX PARTITIONS & EXTENSION RING



TP820



TP422❶

Cat. #	Description	Unit qty.	Wt. lbs. per 100
Masonry box partitions			
TP820	Non-metallic partition for 2½″ deep masonry boxes	25	3
TP821	Non-metallic partition for 3½″ deep masonry boxes	25	4

Cat. #	Knockouts		Unit qty.	Wt. lbs. per 100
	Sides	Bottom		
1½″ deep switch & masonry box extension ring				
TP422❶	8 - ½″, 4 - ½″ + ¾″ E	-	50	50

❶For use as extension with switch box, not four square box.

 Copyright® 2021 Commercial Products Catalog


GANGABLE MASONRY BOXES

UL LISTED

Features:

- The gangable feature allows the option of creating a multiple gang box from a single gang box by simply removing the combo head screw holding the side with a #2 bit and connecting the two (or more) boxes together re-using the screws
- Non-metallic partitions (ordered separately) install quickly and easily without tools in multi-gang boxes and are used to separate power and control circuits within the same box, as required by the National Electrical Code®






Cat. #	Width	Knockouts			Capacity cu. in.	Unit qty.	Wt. lbs. per 100
		Each end	Each side	Bottom			
2½" deep x 3¾" high, ½" & ¾" concentric KOs							
TP671	1 15/16"	2	2	2	15.5	20	63
3½" deep x 3¾" high, ½" & ¾" concentric KOs							
TP675	1 15/16"	2	4	2	22.0	20	82

GANGABLE MASONRY BOX PARTITIONS



TP654

Cat. #	Description	Unit qty.	Wt. lbs. per 100
TP654	Non-metallic partition for 2½" deep gangable masonry boxes	25	4
TP656	Non-metallic partition for 3½" deep gangable masonry boxes	25	6