
NEMA 15-30


NEMA 15-50


NEMA 15-60

3-Pole 4-Wire Grounding
30 Amp 250V 3Ø③; 50 Amp 250V 3Ø③; 60 Amp 250V 3Ø③; Straight Blade Devices


8432ANPB


8450FR


8462ANPB


8460FR


8460NP

Features - Specifications

ANGLE PLUG

- Rugged nylon angle plug with four-position adjustment
- Nonmetallic nylon cord grip
- Dead front construction
- High-impact nylon face
- Pressure screw terminals for secure terminations

ALL PLUGS

- UL Listed File #E1381 – Guide #AXUT
- CSA Certified File #LR16215 – Guide #20T2
- NOM

FLUSH RECEPTACLE

- Face and base molded of heat and impact-resistant reinforced thermoplastic polyester
- Lug type terminals bundle strands to provide secure terminations
- Captive Allen head terminal screws permit high clamping pressure
- Heavy-duty double-wipe contacts
- UL Listed File #E2258 – Guide #RTRT
- CSA Certified File #LR16215 – Guide #365E1
- NOM

30 AMP 250V 3Ø▲ RECEPTACLES AND ATTACHMENT PLUGS NEMA 15-30

CAT. NO.	CORD DIA.	PLATES (2-GANG)①		DESCRIPTION
		STAINLESS STEEL TYPE 302/304	040 (1.0) BRASS	
8430FR②	—	**S654K**	**S2854K**	Flush receptacle, black RTP③
8432ANPB	.625-1.320 (15.9-33.5)	—	—	Angle plug, black/white nylon
8430NP	.425-1.320 (10.8-33.5)	—	—	Plug, gray thermoplastic


50 AMP 250V 3Ø▲ RECEPTACLES AND ATTACHMENT PLUGS NEMA 15-50

8450FR②	—	**S654K**	**S2854K**	Flush receptacle, black RTP③
8452ANPB	.625-1.320 (15.9-33.5)	—	—	Angle plug, black/white nylon
8450NP	.425-1.320 (10.8-33.5)	—	—	Plug, gray thermoplastic


60 AMP 250V 3Ø▲ RECEPTACLES AND ATTACHMENT PLUGS NEMA 15-60

8460FR②	—	**S654K**	**S2854K**	Flush receptacle, black RTP③
8462ANPB	.625-1.320 (15.9-33.5)	—	—	Angle plug, black/white nylon
8460NP	.425-1.320 (10.8-33.5)	—	—	Plug, gray thermoplastic


PRODUCT DIMENSIONS – ( ) Indicates mm dimensions



8432ANPB, 8452ANPB, 8462ANPB

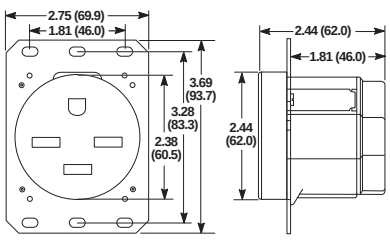

8430FR, 8450FR, 8460FR



8430NP, 8450NP, 8460NP

① For more information on plates see Sections M & N.
② Receptacle fits standard boxes 4 11/16" (119.1) square and not less than 2 1/8" (54.0) deep.
③ RTP – Reinforced Thermoplastic Polyester.
Specifications are subject to change without notice.